

Trevoli TPV-200SA						
Part No.	hp	kW	Outlet	Phase	Voltage	Max Solid
TPV-200SA	0.25	0.2	32mm	1	220-240	19mm



DESCRIPTION




The Trevoli TPV range of submersible pumps are ideal for pumping clean, salty and dirty water. Fitted with an anti-clogging vortex impeller they can process solids up to 19mm. Constructed of corrosion resistant materials, these pumps can withstand harsh conditions. An ideal pump for fountains, water transfer, pond circulation or emptying sumps.

FEATURES

- 10 Metre electrical cord
- 32mm threaded outlet
- Double mechanical seal
- Hermetically sealed cable entry
- Maximum Immersion Depth: 6M

TECHNICAL FEATURES

- Liquid Temperature: 0°C to 40°C
- pH: 6 to 8
- Protection Class: IP68
- Rated for continuous use

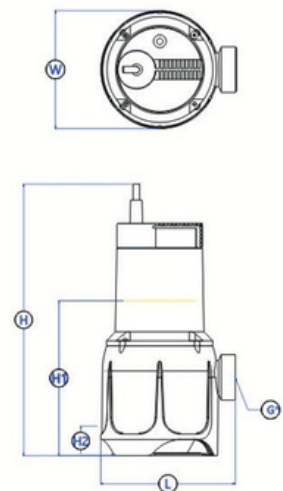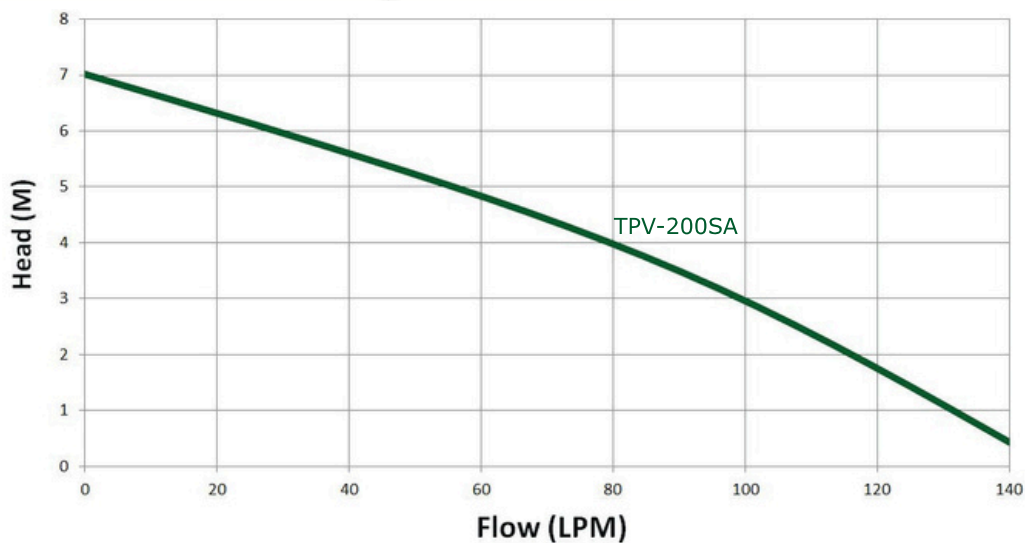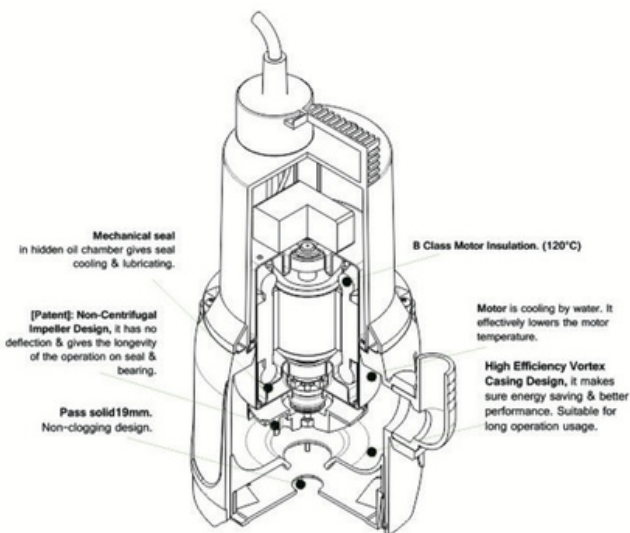

Dimensions							
Part No.	L	W	H	H1	H2	G	Weight
TPV-200SA	168mm	146mm	323mm	194mm	37mm	32mm	3.6kg